


# EB-PQ2216B

## DATASHEET / BROCHURE

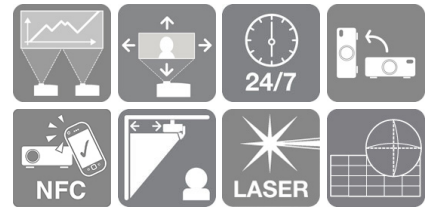

## EB-PQ2216B

**Best for 4K installations and experiences. Compact 16,000-lumen 4K 3LCD laser projector with Crystal Motion technology.**

Building on the success of the EB-PU Series, the EB-PQ2216B is not only small and light, but is highly affordable, versatile, energy-efficient and packed with advanced features. Allowing you the freedom to create unforgettable immersive experiences. Marvel at the clarity of the images produced by Epson's latest 4K technology. Combining its patented, state of the art 4K Crystal Motion, panel thermo-control and double micro-lens array technologies, Epson achieves a new benchmark in 4K image quality. Featuring a wide range of connectivity, including 12G SDI in/out and HDMI in/out supporting 120Hz 4K. This high brightness projector also benefits from cross-platform lens compatibility, using the same 4K lenses as the existing EB-PU Series, including the ELPLX02S zero-offset ultra-short throw lens which is perfect for immersive spaces. This projector is supplied 'body-only', allowing you to build the perfect solution for your installation. Built for exceptional reliability, the EB-PQ2216B features IP5X rated dust resistance<sup>1</sup> and up to 20,000 hours maintenance-free operation, or even longer in extended modes. Compatible with the ELPEC01 camera, Epson Projector Professional Tool and Epson Projector Config Tool for a wealth of calibration, assistance and control functionality.

## KEY FEATURES

- **Patented 4K and imaging technology**  
Outstanding 4K image quality delivers superb immersivity
- **Ultra-compact and lightweight**  
Small, powerful 16,000lm 4K projector
- **Cross-platform lens compatibility**  
Lets you build the optimal projection solution for every requirement
- **Fit-and-forget reliability**  
Filter-free design and IP5X dust resistance<sup>1</sup>
- **Reduced environmental impact**  
Energy-efficient with reduced requirements for packaging and transport

## PRODUCT SPECIFICATIONS

EB-PQ2216B

### TECHNOLOGY

Projection System	3LCD Technology RGB liquid crystal shutter
LCD Panel	1.04 inches with C2 Fine

### IMAGE

Color Light Output	16000 Lumens - 11200 Lumens (economy)
White Light Output	16000 Lumens - 11200 Lumens (economy)
Resolution	4K 3840 x 2160, 8.3m pixels, 16:9
Contrast Ratio	5,000,000
Light Source	Laser
Laser Light source	20000 hr Durability High, 30000 hr Durability Eco
Keystone Correction	Manual vertical: 30, Manual horizontal: 45
Colour Video Processing	10 Bits Color
Colour Reproduction	Upto 1.07 billion colours

### OPTICAL

Throw Ratio	0.34 - 7.16:1
Lens	Optical
Projection Lens Focus	Motorized

### CONNECTIVITY

Interfaces	Jack plug out (1 x), HDBaseT (1 x), Ethernet interface (100 Base-TX / 10 Base-T) (1 x), Remote (1 x), HDMI out (1 x), Near Field Communication (NFC) (1 x), USB content playback (1 x), 12G SDI Input (1 x), USB 2.0-A (2 x), RS-232C (1 x), 12G SDI Output (1 x), Wireless LAN IEEE 802.11a/b/g/n (Optional), HDMI in (2 x), USB 2.0 Type B (Service Only) (1 x)
Network Protocol	HTTPS, SNMP, PJLink, IPv6, ESC/VP.net

### ADVANCED FEATURES

Security	Kensington lock, Control panel lock, Password protection, Wireless LAN security, Padlock, Wireless LAN unit lock
Other Features	21:9 aspect ratio support, A/V mute, Auto Power On, Direct Power on/off, Edge Blending, Frame interpolation, Freeze image, Horizontal and vertical keystone correction, Lens position memory, Long light source life, Point correction, OSD copy function, Quick Corner, Schedule Function, Web Control, Wireless LAN capable, Auto source search, iProjection App
Video Colour Modes	Dynamic, Natural, Presentation, BT709, Multi Projection, DICOM SIM, Cinema
Projector Control	Extron XTP, AMX Device Discovery, Crestron Integrated Partner, Extron IP Link

## PRODUCT SPECIFICATIONS

GENERAL	
Heat Dissipation	3,788 BTUperhour
Product dimensions	586 mm x 492 mm x 218 mm (Width x Depth x Height)
Supply Voltage	AC 100 V - 240 V, 50 Hz - 60 Hz
Included Software	Epson Creative Projection, Epson Projector Config Tool, Epson Projector Content Manager, Epson Projector Management, Epson Projector Professional Tool
Noise Level	Normal: 44 dB (A) - Economy: 36 dB (A)
Supported Temperature	Storage -10 °C - 60 °C
Supported Humidity	Operation 20 % - 80 %, Storage 10 % - 90 %
Options	Camera module, Wireless LAN unit, Ceiling mount
Room Type / Application	Large Meeting Room / Auditorium, Meeting room / Classroom, Projection Mapping, Rental / Staging, Signage / Retail, Visitor Attraction, Boardroom
Positioning	Ceiling Mounted, Desktop, Floor, Flying Frame, Table Mounted, Wall Mounted
Colour	Black

### OTHER

EB-PQ2216B

## WHAT'S IN THE BOX

- Cable cover
- Lens connector cap
- Main unit
- Power cable
- Remote control incl. batteries
- Information sheet
- Quick Start Guide
- Document Pack

## OPTIONAL ACCESSORIES

- Camera Unit - ELPEC01  
V12HA46010
- Ceiling Mount - ELPMB68  
V12H006AE0
- Lens - ELPLL08 - Long throw - EB-PU Series  
V12H004L08
- Lens - ELPLM10 - Mid throw 3 - EB-PU Series  
V12H004M0A
- Lens - ELPLM11 - Mid throw 4 - EB-PU Series  
V12H004M0B
- Lens - ELPLM15 - Mid throw - EB-PU Series  
V12H004M0F
- Lens - ELPLU03S - Short throw off axis 1 - EB-PU Series  
V12H004UA3
- Lens - ELPLU04 - Short throw off axis 2 - EB-PU Series  
V12H004U04
- Lens - ELPLW05 - Wide zoom 1 - EB-PU Series  
V12H004W05
- Lens - ELPLW06 - Wide zoom 2 - EB-PU Series  
V12H004W06