

EB-PU2113W




EB-PU2113W

Best for mid-to-large venue installations. Compact 13,000-lumen WUXGA 3LCD laser projector with 4K enhancement and IP5X certification.

The reduced weight and size means the projector is easier to store, transport and install, saving on warehouse space as well as labour and delivery costs. This high lumens, 3LCD projector offers WUXGA resolution with 4K enhancement and HDR for rich textures and sharper images. The EB-PU2113W's functionality enables simple installation, stacking, lens flexibility and control. It includes in-built processing for PC-free stacking which means two supported projectors can be stacked to double the brightness without the need for external computerware. Includes outstanding dust resistance as the hermetically sealed optical engine, and laser light source unit, ensure stable brightness output over long periods, even in high dust environments.

DATASHEET / BROCHURE

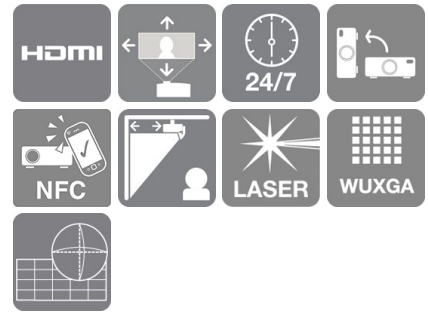

KEY FEATURES

- **Ultra-lightweight and compact**
Easy to store, transport and install
- **Stunning image displays**
13,000lm, 4K Enhancement technology, WUXGA resolution
- **Easy to use**
Simple installation, stacking, lens flexibility and control
- **Fit-and-forget reliability**
Enhanced dust resistant construction
- IP5X certified
- **Environmental benefits**
Lower power consumption, reduced packaging, reduced weight

PRODUCT SPECIFICATIONS

EB-PU2113W

TECHNOLOGY	
Projection System	3LCD Technology
LCD Panel	1.03 inches with C2 Fine

IMAGE	
Color Light Output	13000 Lumens - 9100 Lumens (economy)
White Light Output	13000 Lumens - 9100 Lumens (economy)
Resolution	WUXGA
High Definition	4K enhancement
Contrast Ratio	5,000,000
Light Source	Laser
Laser Light source	20000 hr Durability High, 30000 hr Durability Eco
Colour Video Processing	10 Bits Color
Colour Reproduction	Upto 1.07 billion colours

OPTICAL	
Throw Ratio	0.35 - 7.41:1
Zoom	Digital, Factor: 1 - 1.6
Screen Size	60 in - 1000 in
Projection Lens Focus	Motorized

CONNECTIVITY	
Interfaces	Wireless LAN IEEE 802.11a/b/g/n (Optional), Near Field Communication (NFC) (1 x), HDMI in (1 x), USB content playback (1 x), USB 2.0-A (2 x), USB 2.0 Type B (Service Only) (1 x), DVI in (1 x), RS-232C (1 x), Remote (1 x), Ethernet Interface (1000 Base-T/ 100-Base TX/ 10-Base-T) (1 x), HDBaseT (1 x), VGA in (1 x), Jack plug out (1 x)
Network Protocol	IPv6, ESC/VP.net, PJLink, HTTPS, SNMP

ADVANCED FEATURES	
Security	Kensington lock, Security bar, Password lock, Password protection, Wireless LAN unit lock, Wireless LAN security
Other Features	4K enhancement, A/V mute, Auto Power On, Auto source search, Direct Power on/off, Edge Blending, Lens position memory, Long light source life, OSD copy function, Power on button, Quick Corner, Schedule Function, Split-Screen-Function, Super resolution, Web Control, Web Remote, iProjection App, 21:9 aspect ratio support, Point correction, Horizontal and vertical keystone correction, Freeze image
Video Colour Modes	Cinema, Dynamic, Natural, Presentation, DICOM SIM, Multi Projection, BT709
Projector Control	AMX, Crestron, Extron

PRODUCT SPECIFICATIONS

GENERAL	
Heat Dissipation	2,938 BTUperhour
Product dimensions	586 mm x 492 mm x 218 mm (Width x Depth x Height)
Supply Voltage	AC 200 V - 240 V, 50 Hz - 60 Hz
Included Software	Epson Projector Content Manager, Epson Projector Management, Epson Projector Professional Tool, Epson Creative Projection, Epson Projector Config Tool
Noise Level	Normal: 34 dB (A) - Economy: 29 dB (A)
Supported Temperature	Storage -10 °C - 60 °C
Supported Humidity	Operation 20 % - 80 %, Storage 10 % - 90 %
Options	Ceiling mount, Wireless LAN unit, Camera module
Room Type / Application	Boardroom, Large Meeting Room / Auditorium, Meeting room / Classroom, Projection Mapping, Rental / Staging, Signage / Retail, Visitor Attraction
Positioning	Ceiling Mounted, Desktop, Flying Frame
Colour	White

OTHER

EB-PU2113W

WHAT'S IN THE BOX

- Power cable
- Remote control incl. batteries
- Cable cover
- Lens connector cap
- Document Pack
- Information sheet
- Main unit
- Quick Start Guide

OPTIONAL ACCESSORIES

- Camera Unit - ELPEC01
V12HA46010
- Ceiling Mount - ELPMB68
V12H006AE0
- Extension Pole - ELPMB70 - For ELPMB68
V12H006AG0
- Lens - ELPLL08 - Long throw - EB-PU Series
V12H004L08
- Lens - ELPLM10 - Mid throw 3 - EB-PU Series
V12H004M0A
- Lens - ELPLM11 - Mid throw 4 - EB-PU Series
V12H004M0B
- Lens - ELPLM15 - Mid throw - EB-PU Series
V12H004M0F
- Lens - ELPLU03S - Short throw off axis 1 - EB-PU Series
V12H004UA3
- Lens - ELPLU04 - Short throw off axis 2 - EB-PU Series
V12H004U04
- Lens - ELPLW05 - Wide zoom 1 - EB-PU Series
V12H004W05

